


# DREXAN™ HeatTracer

## STAT-LS-ADJ

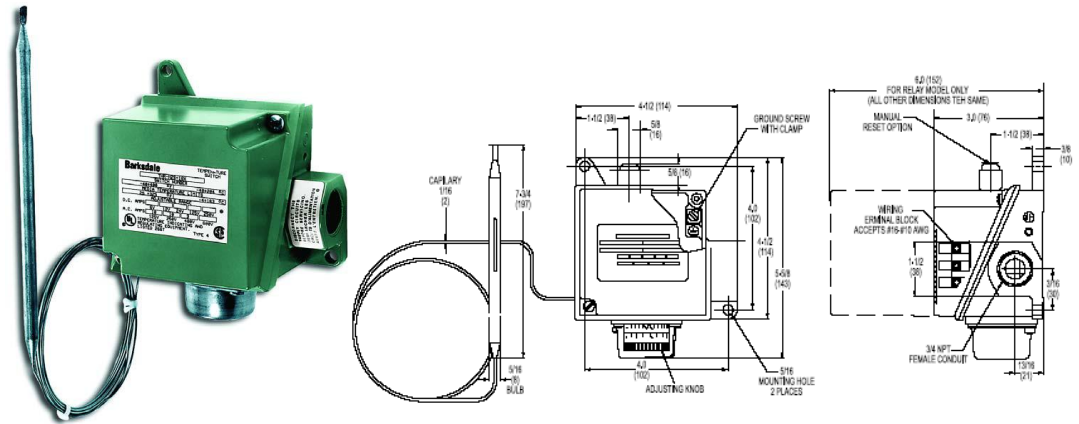

The STAT-LS-ADJ thermostat is ideal for applications where freeze protection or lower-range temperature control is critical. In cold climates this thermostat switches heating devices that prevent pipes, valves, tanks and fittings from freezing.

This thermostat can be used in ambient-sensing applications by placing the sensor in the air or as a line-sensing thermostat by securing the bulb to the pipe or tank. It can be used as a single circuit control or as a pilot control for several circuits by switching a contactor.

### Specifications

Enclosure Rating	NEMA 4X
Entries	One 3/4 inch NPT conduit hub
Set point	External adjustment knob 25 to 325 deg.F (-4 to 163C)
Sensor exposure limits	-40 to 420 degrees F (-40 to 216C)
Housing exposure limit	-40 to 140 degrees F (-40 to 60C)
Enclosure material	Anodized die cast aluminum Other part stainless steel
Switch	SPDT, pre-wired snap action
Electrical rating	22 amp @ 125/250/480 VAC
Accuracy	+ 1% of full scale
Sensor & capillary Type	316L stainless steel, silicone oil filled bulb 7-3/4"(197mm) 5/16"(8mm) diameter 10' (3.05m) long capillary.
Connection	3 pole terminal block accepts 14-10 AWG wire
Approvals	CSA and UL listed. (Ordinary Areas)
Manufacturer	Barksdale

**Right Product, Right Place, Right Price™**

Control and Monitoring

www.drexanheattracer.com

Tech Line:  
1-800-663-6873

Drexan HeatTracer Division  
© 2009 Drexan Energy Systems

Doc. No.HD090818-15